





YK 50 MB

Cooling Capacity 3 - 5 kW Air Flow 750 m³/h

45 C° (Outside Temperature) **Performance Limit** 30 A @12 VDC - 15 A @24 VDC **Operating Current** 1098 * 366 * 174 mm

Unit Weight 25 kg *

Refrigerant R134a

Inside Dimensions



* Mounting kit weight not included.

ECE R10 Certificate Electromagnetic compatibility approval



Functional Climatronic Control

Control your thermal comfort as you wish with effective temperature and air speed control.

Indoor temperature, outdoor temperature, set temperature, fan stage, air damper, and operating mode are shown on a 2.1 inch LCD screen.

6 independent buttons are used. These are used for temperature increase, temperature reduction, cooling operation, heating operation, fan stage, and air flap control.

Thermostat-adjusted temperature control and 3-stage airspeed control are provided.

YILKAR



Compatible Lines with Your Vehicle

Yılkar monoblock rooftop air conditioners provide an integrity in harmony with your vehicle with longitudinal lines.


Thanks to its compact design, it contains all the parts of your air conditioner, allowing you to have more usable space in your vehicle.

Our top covers produced in Yılkar's own facilities have paint protection resistant to the

Effective System Performance Control

The efficiency of fluid control determines the quality of your air conditioner

Fluid control protects your compressor by adapting your air conditioner to variable ambient parameters, keeping its performance at the highest level at all times.

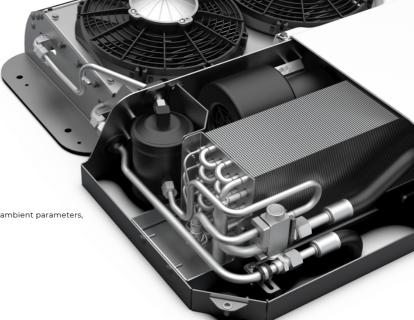

- * The standard paint color for aluminum is gray.
- ** Fiber color is white



Compatible with the Vehicle Interior

Yılkar offers modular solutions to all thermal comfort needs of your vehicle.

Paintable interior steering part provides integrity with the interior of the vehicle. It can be ordered with 2 kinds of material options.

Paintable aluminum*

Fiber**

